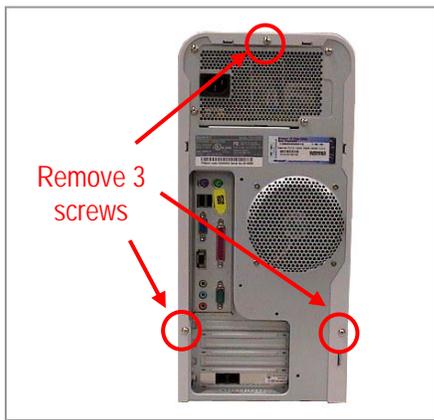
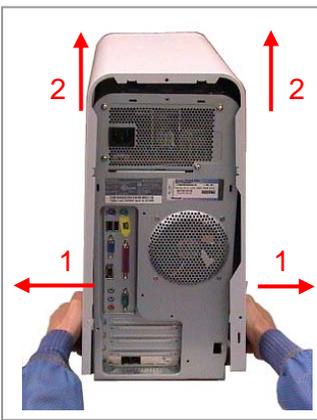
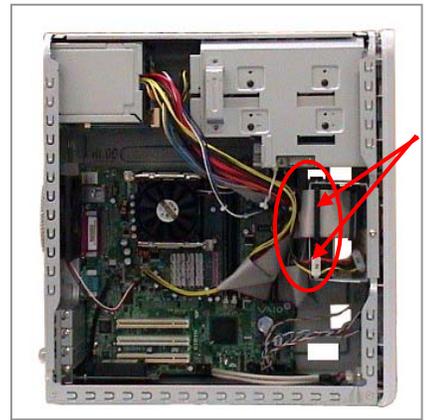




IMPORTANT! PLEASE READ BEFORE YOU START

These easy instructions are intended to guide you through the replacement process.


- ✓ To avoid electric shock please make sure product is turned off and disconnected from the power source. Remove jewelry before you begin work to avoid scratching the surface of your desktop computer.*
- ✓ Place your desktop computer on a clean, stable and covered surface to avoid damage to the computer's case.*
- ✓ Follow the ESD (Electrostatic Discharge) damage prevention instructions:
 - Hold parts by the edges, away from exposed circuitry when possible.
 - Do not walk around excessively as this promotes static build-up.
- ✓ The appearance of the electronic components shown in the illustrations may be different from the components shipped. This slight difference does not affect the accuracy of these instructions.

* Sony is not responsible for any loss of data associated with your computer or any damage caused by incorrect handling of the computer under these procedures. The terms of your Sony Limited Warranty continue to apply.




			
<p>Step 1. Place your PC on a solid surface. CAUTION! ⚠ Disconnect the power cord. Failure to do so can result in unit damage or personal injury. Using the enclosed magnetic screwdriver, remove the marked screws (3) and set them aside.</p>	<p>Step 2. To remove the cover, hold both sides of the computer as shown and slide it towards you. Grab bottom edges of the cover and carefully spread them out and then lift up the cover.</p>		<p>Step 3. Rotate the PC so the inside is facing to you. Identify the location of the Hard Drive's connections.</p>

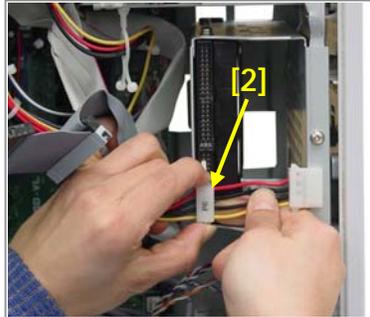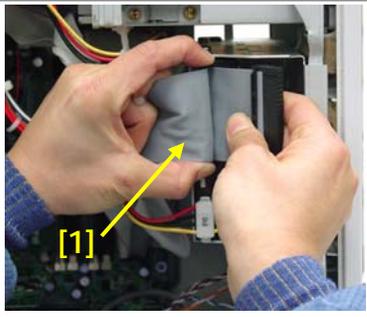


Step 4. Proceed to disconnect the IDE Cable [1] and Power Cable [2] from the Hard Drive. **IMPORTANT!** Some force may be required to initiate the removal of the cables. Take caution not to damage the cables. Pull with equal force on both sides of each cable to remove them as shown above.

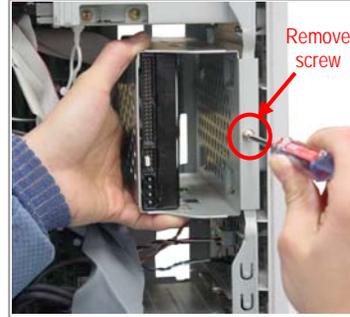


Step 5. Using the enclosed magnetic screwdriver, remove the marked screw as shown on the picture. With one hand hold the bracket enclosure while pulling the complete assembly out of the unit.

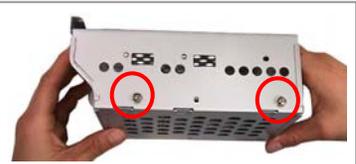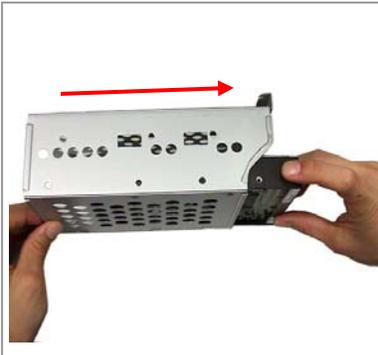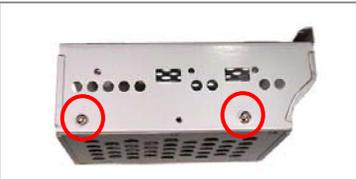


Step 6. Using the enclosed magnetic screwdriver, remove the four (4) screws that secure the Hard Drive into the bracket enclosure. **IMPORTANT!** Before proceeding, take note of original position of the Drive inside the bracket. Slide out the original drive.

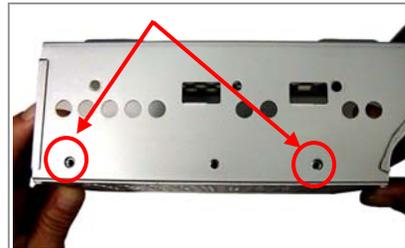

Step 7. Slide New Hard drive inside bracket with all holes in alignment. Reinstall the four (4) screws previously removed, securing new drive into the bracket.

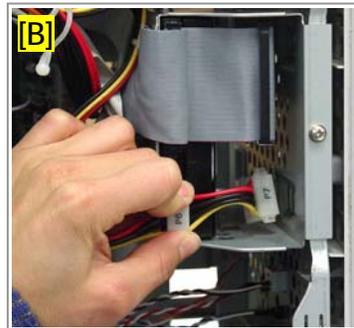

Step 8. [A] Reinstall the bracket enclosure being careful to align the guides. Hold the bracket in place and reinstall the screw previously removed. [B] Proceed to Reconnect the Hard Drive cables into their original position.

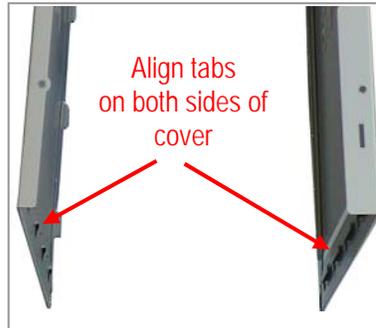

Step 9. Lower the cover onto the unit, Ensure that tabs on the bottom edge into the base of your computer. Compress both sides of the cover and push forward while holding the front of your computer. Reinstall the three (3) screws removed in step 1.