

Personal Audio System

Operating Instructions

ZS-R570BT

http://www.sony.net/



WARNING

To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.

To reduce the risk of fire or electric shock, do not expose this apparatus to dripping or splashing, and do not place objects filled with liquids, such as vases, on the apparatus.

As the main plug is used to disconnect the unit from the mains, connect the unit to an easily accessible AC outlet. Should you notice an abnormality in the unit, disconnect the main plug from the AC outlet immediately.

The unit is not disconnected from the AC power source (mains) as long as it is connected to the wall outlet, even if the unit itself has been turned off.

Do not install the appliance in a confined space, such as a bookcase or built-in cabinet. Excessive sound pressure from earphones and headphones can cause hearing loss.

Do not expose the batteries (battery pack or batteries installed) to excessive heat such as sunshine, fire or the like for a long time. The nameplate is located on the bottom exterior.

**Notice for customers: the following information is only applicable to equipment sold in countries applying EU directives**


This product has been manufactured by or on behalf of Sony Corporation, 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan. Inquiries related to product compliance based on European Union legislation shall be addressed to the authorized representative, Sony Deutschland GmbH, Hedelfinger Strasse 61, 70327 Stuttgart, Germany. For any service or guarantee matters, please refer to the addresses provided in the separate service or guarantee documents.

**Disposal of Old Electrical & Electronic Equipment (Applicable in the European Union and other European countries with separate collection systems)**

This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local Civic Office, your household waste disposal service or the shop where you purchased the product.

Power Sources

Connect the AC power cord **A**, or insert six R14 (size C) batteries (not supplied) into the battery compartment **B**. For models with a voltage selector, set VOLTAGE SELECTOR **C** to the local power line voltage.

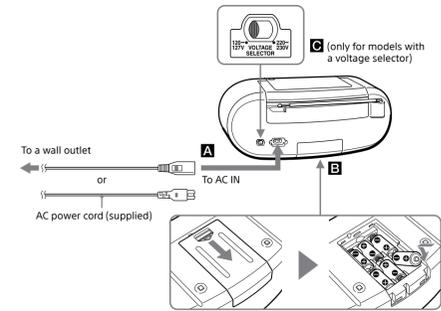


- Replace the batteries when the OPR/BATT indicator **18** dims, or when the unit becomes inoperable. Replace all of the batteries with new ones. Before you replace the batteries, be sure to remove any CD and disconnect any USB devices or optional components from the unit.
- Use the unit on batteries, disconnect the AC power cord from the unit and the wall outlet.

To use the power-management function

This unit is equipped with an automatic standby function. With this function, the unit enters standby mode automatically after about 15 minutes if there is no operation or audio signal output. To turn standby mode on or off, press DISPLAY **13** while holding down **18**. Each time you press the buttons, "AUTO STANDBY ON" or "AUTO STANDBY OFF" appears on the display.

- The displayed content starts flashing on the display about 2 minutes before entering standby mode.
- In standby mode with the AC power cord connected, "STANDBY" appears on the display (European models only).
- The automatic standby function is not available with the FM/AM function (and the AUDIO IN function except for European models).

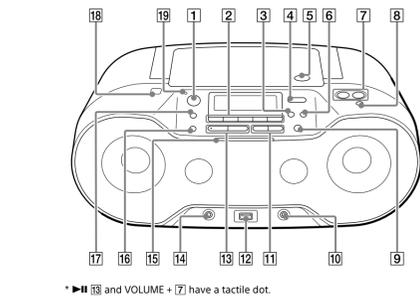

\* **18** and VOLUME **7** have a tactile dot.

Europe Only

**Disposal of waste batteries (applicable in the European Union and other European countries with separate collection systems)**

This symbol on the battery or on the packaging indicates that the battery provided with this product shall not be treated as household waste. On certain batteries this symbol might be used in combination with a chemical symbol. The chemical symbols for mercury (Hg) or lead (Pb) are added if the battery contains more than 0.0005% mercury or 0.004% lead. By ensuring these batteries are disposed of correctly, you will help prevent potentially negative consequences for the environment and human health which could otherwise be caused by inappropriate waste handling of the battery. The recycling of the materials will help to conserve natural resources.

In case of products that for safety, performance or data integrity reasons require a permanent connection with an incorporated battery, this battery should be replaced by qualified service staff only. To ensure that the battery will be treated properly, hand over the product at end-of-life to the applicable collection point for the recycling of electrical and electronic equipment.

For all other batteries, please view the section on how to remove the battery from the product safely. Hand the battery over to the applicable collection point for the recycling of waste batteries.

For more detailed information about recycling of this product or battery, please contact your local Civic Office, your household waste disposal service or the shop where you purchased the product.

License and Trademark Notice

- MPEG Layer 3 audio coding technology and patents licensed from Fraunhofer IIS and Thomson.
- Windows Media is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.
- This product contains technology subject to certain intellectual property rights of Microsoft. Use or distribution of this technology outside of this product is prohibited without the appropriate license(s) from Microsoft.
- The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Sony Corporation is under license.
- The N Mark is a trademark or registered trademark of NFC Forum, Inc. in the United States and in other countries.
- Android™ and Google Play™ are trademarks of Google Inc.
- Other trademarks and trade names are those of their respective owners. In this manual, ™ and ® marks are not specified.

For customers in the United Arab Emirates

TRA REGISTERED NO: ER098381/12  
DEALER NO: DA0065531/11

**Illumination** **15** has the following two features.

**Indication of function change**  
When switching to one of five functions, the center of the illumination (white) increases in intensity to notify the user of a function change. When switching to the Bluetooth function, both sides of the illumination are also lit in blue.

Before using the unit

**To turn the power on or off**  
Press POWER (or OPERATE) **11**. You can also turn on the power of this unit using the direct power-on function (below). In this manual, operations are mainly explained using the direct power-on function.

**To use the direct power-on function**  
Press CD **2**, USB **2**, BLUETOOTH **2**, RADIO FM/AM **2** or AUDIO IN **2** while the unit is turned off. The power lights on with the relevant function selected.

**To adjust the volume**  
Press VOLUME + or - **7**. The volume level of this unit is adjustable in steps from 0 to 31. For the 31st step, "VOL MAX" is displayed.

**To listen through headphones**  
Connect headphones to the **1** (headphones) Jack **18**.

**To reinforce the bass**  
Press MEGA BASS **8**. "MEGA BASS" lights up on the display. To return to normal sound, press the button again.

**To turn off the automatic demonstration (Latin American models only)**  
Since demonstration mode is enabled by default, the demonstration will start automatically in the following cases:  
—when the unit is turned off  
—when there is no audio output in the CD and USB function.  
—when the Bluetooth connection is not established in the Bluetooth function (when "NO ID" is displayed).  
To turn off the automatic demonstration, hold down MODE **17** until "DEMO MODE OFF" appears on the display.

**Note**  
Demonstration mode does not function when operating using batteries.




**To turn off the light sync function**  
The light sync function creates lighting effects that synchronize with the music source. By default, this function is on, but you can turn it off as desired.  
Hold down LIGHT SYNC **16** until "LIGHT SYNC OFF" appears on the display.  
To turn on the function, hold down the button again until "LIGHT SYNC ON" appears.

Playing a music disc

You can play the following types of discs with this unit.

- Audio CDs on which CD-DA tracks are recorded in CD-DA disc format.
- CD-R/CD-RW discs on which MP3 or WMA audio files are recorded in ISO 9660 Level 1/Level 2 or Joliet.

- Press CD **2** to turn on the CD function.
- Press PUSH OPEN/CLOSE **5**, and place a disc in the CD compartment with the label side up.  
When placing the disc, gently push the center part of the disc until a click sound is heard and the disc snaps in the disc holder.
- Close the CD compartment door securely by pushing down on the PUSH OPEN/CLOSE **5** mark **5**. (Example: when an audio CD is loaded)




When you play an MP3/WMA disc, the folder name\* and song title are displayed before the playing time\*\* appears.  
\* If there is no folder, "ROOT" appears on the display.  
\*\* If the playing time is longer than 100 minutes, "...:.." appears on the display.

Other operations	To Do this
Pause playback	Press <b>11</b> <b>13</b> . To return to playback, press the button again.
Stop playback	Press <b>11</b> <b>13</b> . When you press <b>11</b> <b>13</b> after playback is stopped, playback starts from the beginning of the track/file you were last playing (Resume Play).
Cancel Resume Play	Press <b>11</b> <b>13</b> twice. When you press <b>11</b> <b>13</b> after you cancel Resume Play, playback starts from the beginning of the first track/file.
Select a folder on an MP3/WMA disc	Press <b>14</b> (Folder) + or - <b>4</b> .
Select a track/file	Press <b>14</b> or <b>11</b> <b>11</b> . You can skip tracks/files one by one.
Find a point in a track/file	Hold down <b>14</b> or <b>11</b> <b>11</b> during playback, and release the button at the desired point. When locating a point while paused, press <b>11</b> <b>13</b> to start playback after the desired point is found.
Remove a USB device	Hold down <b>11</b> <b>13</b> until "NO DEV" appears on the display, and then disconnect the USB device.

**Tip**  
Resume Play is cancelled if you press **11** **13**, open the CD compartment or turn off the unit.

**Lighting effects for audio output**  
Lighting effects (both sides of the illumination are lit in red) are created that synchronize with the music source. You can turn this function on or off as desired (See "To turn off the light sync function").

Example of folder structure and playing order

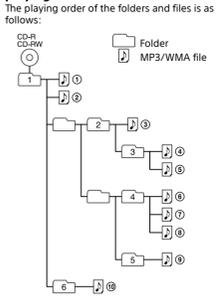

Notes on MP3/WMA discs

- When a disc is loaded, the unit reads all the files on that disc. During this time, "READING" is displayed. If there are many folders or non-MP3/WMA files on the disc, it may take a long time for play to begin or for the next MP3/WMA file to start to play.
- We recommend that non-MP3/WMA files or unnecessary folders are excluded when creating MP3/WMA discs.
- During playback, folders that contain no MP3/WMA files are skipped.
- The audio formats supported by this unit are as follows:  
—MP3: File extension ".mp3"  
—WMA: File extension ".wma"  
Note that even if the file name has the correct file extension but the actual file was created in a different audio format, this unit may produce noise or may malfunction.  
—MP3 PRO format is not supported.  
—WMA files encoded in WMA DRM, WMA Lossless and WMA PRO formats cannot be played back.  
—This unit cannot play audio files in a disc in the following cases:  
—When the total number of audio files exceeds 511.  
—When the total number of folders on a single disc exceeds 511.  
—When the directory level (folder depths) exceeds 9 (including the "ROOT" folder).
- Folder names and file names can be displayed with up to 32 characters, including quotation marks.
- Characters and symbols that cannot be displayed by the unit will appear as "...".  
—This unit conforms to version 1.0, 1.1, 2.2, 2.3 and 2.4 of the ID3 tag format for MP3 files and the WMA tag format (defined by ASF (Advanced Systems Format) specification) for WMA files. When a file has the ID3 or WMA tag information, song title, artist name, and album name will be displayed. If a file does not have the tag information, the unit displays as follows:  
—File name instead of the song title.  
—"NO ARTIST" message instead of the artist name.  
—"NO ALBUM" message instead of the album name.  
ID3 and WMA tag information can be displayed up to 32 characters.

**To change play modes**  
Press MODE **17** repeatedly while the disc is stopped. For details, see "Selecting play mode" on the back page.

Listening to music on a USB device

You can listen to audio files stored on a USB device (a digital music player or USB storage media). Audio files in MP3 and WMA formats\* can be played on this unit. For compatible USB devices, see "Compatible USB devices" on the back page.

- Files with DRM (Digital Rights Management) copyright protection or files downloaded from an online music store cannot be played on this unit. If you try to play one of these files, the unit plays the next unprotected audio file.

- Connect the USB device to the **14** (USB) port **12**.
- Press USB **2** to turn on the USB function. This unit cannot be used to charge USB devices.



- If the USB device does not have a volume label, "STORAGE DRIVE" scrolls. A volume label is a name that you can assign to data-storage media or files on this unit.
- Press **11** **13** to start playback. The folder name and song title are displayed, and then the file number and playing time appear.



\* If the playing time is longer than 100 minutes, "...:.." appears on the display.

Other operations	To Do this
Pause playback	Press <b>11</b> <b>13</b> . To return to playback, press the button again.
Stop playback	Press <b>11</b> <b>13</b> . When you press <b>11</b> <b>13</b> after playback is stopped, playback starts from the point where you stopped playback (Resume Play).
Cancel Resume Play	Press <b>11</b> <b>13</b> twice. When you press <b>11</b> <b>13</b> after you cancel Resume Play, playback starts from the beginning of the first file.
Select a folder	Press <b>14</b> (Folder) + or - <b>4</b> .
Select a file	Press <b>14</b> or <b>11</b> <b>11</b> . You can skip files one by one. To skip files continuously, hold down <b>14</b> or <b>11</b> <b>11</b> and release the button at the desired track/file.
Find a point in a file	Hold down <b>14</b> or <b>11</b> <b>11</b> during playback, and release the button at the desired point. When locating a point while paused, press <b>11</b> <b>13</b> to start playback after the desired point is found.
Remove a USB device	Hold down <b>11</b> <b>13</b> until "NO DEV" appears on the display, and then disconnect the USB device.

\* When playing a VBR MP3/WMA file, playback may restart from a different point.

**Note**  
When removing a USB device, always hold down **11** **13** until "NO DEV" appears on the display. Removing the USB device without performing this step may corrupt the data on the USB device or damage the device itself.

**To change play modes**  
Press MODE **17** repeatedly while the USB device is stopped. For details, see "Selecting play mode" on the back page.

- This unit may take a long time before playback starts when:  
—the folder structure is complex.  
—the USB device is close to capacity.
- Do not save non-MP3/WMA files or unnecessary folders to a USB device that contains MP3/WMA files.
- During playback, folders that contain no MP3/WMA files are skipped.
- The audio formats supported by this unit are as follows:  
—MP3: file extension ".mp3"  
—WMA: file extension ".wma"  
Note that even if the file name has the correct file extension but the actual file was created in a different audio format, this unit may produce noise or may malfunction.
- MP3 PRO format is not supported.
- WMA files encoded in WMA DRM, WMA Lossless and WMA PRO formats cannot be played back.
- This unit cannot play audio files on a USB device in the following cases:  
—when the total number of audio files in a single USB device exceeds 5,000  
—when the total number of folders on a single USB device exceeds 255 (including the "ROOT" folder)  
—when the directory level (folder depths) exceeds 8 (including the "ROOT" folder).
- The folders may vary depending on the file and folder structure.
- Compatibility with all encoding/writing software is not guaranteed. If audio files on the USB device were originally encoded with incompatible software, those files may produce noise or interrupted sound, or may not be played back at all.
- Folder names and file names can be displayed using up to 32 characters, including quotation marks.
- Characters and symbols that cannot be displayed by the unit will appear as "...".  
—This unit conforms to version 1.0, 1.1, 2.2, 2.3 and 2.4 of the ID3 tag format for MP3 files and the WMA tag format (defined by ASF (Advanced Systems Format) specification) for WMA files. When a file has the ID3 or WMA tag information, song title, artist name, and album name will be displayed. If a file does not have the tag information, the unit displays as follows:  
—File name instead of the song title.  
—"NO ARTIST" message instead of the artist name.  
—"NO ALBUM" message instead of the album name.  
ID3 and WMA tag information can be displayed up to 32 characters.

**Pattern A**  
**Pairing and connecting with a Bluetooth device**

- Press BLUETOOTH **2** to turn on the Bluetooth function.
- Turn on the Bluetooth function of the Bluetooth device.

For details, refer to the operating instructions supplied with the device.  
If no devices have been paired, such as when you press BLUETOOTH **2** for the first time after you purchase the unit, the unit automatically enters pairing mode, and the Bluetooth indicator **6** and "PAIRING" on the display flash. In this case, proceed to step 4.

- Hold down BLUETOOTH-PAIRING **2** until two beeps are heard.  
The unit enters pairing mode, and the Bluetooth indicator **6** and "PAIRING" on the display flash.



Recording music from a disc to a USB device

You can record a whole disc (Synchro Recording) or a currently playing track or file (single track recording) to a USB device (digital music player or USB storage media, etc.).  
When recording from a CD, the tracks are recorded as MP3 files at 128 kbps. When recording from an MP3/WMA disc, MP3/WMA files are recorded with the same bit rate as the original MP3/WMA files.  
For compatible USB devices, see "Compatible USB devices" on the back page.

- Connect the USB device to the **14** (USB) port **12**.
- Place a disc you want to record in the CD compartment.

**To record a whole disc**  
Proceed to step 3.

**To record MP3/WMA files in a specific folder**  
Press **14** (Folder) + or - **4** repeatedly to select the folder you want.

**To record only your favorite tracks/files**  
Perform steps 1 to 5 of "Creating your own program (Program Play)" on the back page.


**To record a single track/file**  
Select and start playback of the track/file you want to record.

- Press REC CD **15** **13**.  
"REC" flashes and the unit starts calculating the amount of free space on the USB device.



When the calculation is finished, "FREE\*\*G"/"FREE\*\*\*M" (remaining storage space on the device, in gigabytes/megabytes), and then "PUSH ENT" appears on the display. If "LOW \*\*\*M" appears on the display, there is insufficient space on the device. To cancel recording, press **11** **13**. To continue recording anyway, proceed to step 4.

- Press ENTER **3**.



Recording starts. Do not remove the USB device while recording.  
Playback stops automatically when Synchro Recording is completed.  
Playback continues when recording of a single track/file is completed.

**Other operations**

To Do this	
Stop recording	Press <b>11</b> <b>13</b> . An MP3/WMA file is created up to the point the recording was stopped.
Remove a USB device	Press USB <b>2</b> , then hold down <b>11</b> <b>13</b> until "NO DEV" appears on the display, and then disconnect the USB device.

**To erase audio files or folders from the USB device**

- Select the audio file or folder you want to erase.  
Press **14** or **11** **11** to select an audio file. Press CD (Folder) + or - **4** to select a folder.
- Press ERASE **6**.  
"ERASE?" appears on the display.
- Press ENTER **3**.  
"TRACK ERASE?" or "FOLDER ERASE?" appears on the display.
- Press ENTER **3**.  
The selected audio file or folder is erased, and "COMPLETE" appears on the display.

**Folder and file generation rules**  
When first recording to a USB device, a "MUSIC" folder is created directly below the "ROOT". Folders and files are generated within any of the transfer mode-oriented folders as follows.

Synchro Recording <sup>1</sup>	Recording source	Folder name	File name
MP3/WMA	Same as the recording source <sup>2</sup>		
CD-DA	"FLDR001" <sup>3</sup>	"TRACK001" <sup>4</sup>	

Single track recording	Recording source	Folder name	File name
MP3/WMA	"REC1" <sup>4</sup>	Same as the recording source <sup>2</sup>	
CD-DA		"TRACK001" <sup>4</sup>	

- <sup>1</sup>Recording a whole disc, MP3/WMA files in a specific folder and only your favorite tracks/files (Program Play)
- <sup>2</sup>A folder name of up to 32 characters can be assigned.
- <sup>3</sup>Folder names are assigned in sequential order up to a maximum of 255 (including the "ROOT" and "MUSIC" folders).
- <sup>4</sup>File names are assigned in sequential order.
- <sup>5</sup>A new file is recorded to the "REC1" folder each time single track recording is performed.

- Recording stops automatically if:  
—the USB device runs out of space during recording  
—the number of audio files and folders on the USB device reaches the limit that the unit can recognize  
—the function is cancelled.
- If a folder or file that you are trying to record has the same name as folder or file already existing on the USB device, a sequential number is added after the name without overwriting the original folder or file.
- You cannot erase MP3/WMA folders during playback or pause.
- Non-MP3/WMA format files or sub folders in the folder to be erased are not erased.
- Radio sound cannot be recorded to a USB device.

**Note on copyright-protected content**  
The recorded music is limited to private use only. Use of the music beyond this limit requires permission from the copyright holders.

Making a wireless connection with Bluetooth devices

You can enjoy music wirelessly via the Bluetooth function built in to your devices. Choose one of the following three connection methods best suited for the Bluetooth device. For details on how to operate your device, refer to the operating instructions supplied with the device.

**Pairing with a Bluetooth device:**  
see **Pattern A**  
Bluetooth devices need to be "paired" with each other beforehand.

**Connecting with a paired device:**  
see **Pattern B**  
To listen to music with a Bluetooth device that has been paired, see this pattern.

**One touch connection with a smartphone (NFC):**  
see **Pattern C**  
Using an NFC-compatible smartphone, you can establish a Bluetooth connection by just touching the unit with it.

- Check the following before operating the unit.  
• Both the unit and the device are placed within 1 m of each other.
- The unit is connected to the AC power cord, or the OPR/BATT indicator **18** is lit.
- The operating instructions supplied with the device are at hand.

Pairing and connecting with a Bluetooth device

- Press BLUETOOTH **2** to turn on the Bluetooth function.
- Turn on the Bluetooth function of the Bluetooth device.

For details, refer to the operating instructions supplied with the device.  
If no devices have been paired, such as when you press BLUETOOTH **2** for the first time after you purchase the unit, the unit automatically enters pairing mode, and the Bluetooth indicator **6** and "PAIRING" on the display flash. In this case, proceed to step 4.

- Hold down BLUETOOTH-PAIRING **2** until two beeps are heard.  
The unit enters pairing mode, and the Bluetooth indicator **6** and "PAIRING" on the display flash.



Recording music from a disc to a USB device

You can record a whole disc (Synchro Recording) or a currently playing track or file (single track recording) to a USB device (digital music player or USB storage media, etc.).  
When recording from a CD, the tracks are recorded as MP3 files at 128 kbps. When recording from an MP3/WMA disc, MP3/WMA files are recorded with the same bit rate as the original MP3/WMA files.  
For compatible USB devices, see "Compatible USB devices" on the back page.

- Connect the USB device to the **14** (USB) port **12**.
- Place a disc you want to record in the CD compartment.


**To record a whole disc**  
Proceed to step 3.

**To record MP3/WMA files in a specific folder**  
Press **14** (Folder) + or - **4** repeatedly to select the folder you want.

**To record only your favorite tracks/files**  
Perform steps 1 to 5 of "Creating your own program (Program Play)" on the back page.


**To record a single track/file**  
Select and start playback of the track/file you want to record.

- Press REC CD **15** **13**.  
"REC" flashes and the unit starts calculating the amount of free space on the USB device.



When the calculation is finished,

## Other Operations

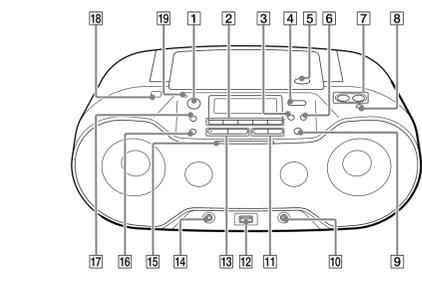

\* ►|| [18] and VOLUME + [7] have a tactile dot.

## Using the display

### Checking MP3/WMA file information

Press DISPLAY [16] repeatedly while playing an MP3/WMA file on the disc/USB device.




\*1 If the file does not have corresponding ID3 or WMA tag information, the file name, "NO ARTIST," and "NO ALBUM" scroll instead of the song title, artist name, and album name, respectively.  
\*2 The artist name or album name will change to this in a few seconds.

### Checking the free space on the USB device

1 Press MODE [17] repeatedly to cancel folder play mode, folder repeat play mode, program play mode or program repeat play mode.



2 Press DISPLAY [16] while the USB device is stopped.



### Checking the connected Bluetooth device name

Press DISPLAY [16] while connecting the Bluetooth device.



### Checking the radio information

Press DISPLAY [16] repeatedly while listening to the radio.



Press ENTER [3] to return to the normal display.

\* A preset number is displayed only when you are listening to the preset radio station.

## Selecting play mode

You can set the unit to play tracks or files repeatedly or in random order while a disc/USB device is stopped.

Press MODE [17] repeatedly.



Each time you press the button, the indication changes as follows:

→ Normal play (None)

→ Single repeat (<math>\rightarrow</math> 1)

→ All repeat (<math>\rightarrow</math>)

→ Selected folder play (<math>\rightarrow</math>\*)

→ Selected folder repeat play (<math>\rightarrow</math>\*)

→ Shuffle play (SHUF)

→ Program play (PGM)

→ Program repeat play (<math>\rightarrow</math> PGM)

\* These functions are available only when playing MP3/WMA files on an MP3/WMA disc or USB device.

### Playing tracks/files repeatedly (Repeat Play)

You can set the unit to repeatedly play CD-DA tracks on an audio CD, or MP3/WMA files on a CD-R/CD-RW disc, or on a USB device in normal and program play modes.

1 Press CD [2] or USB [2] to turn on the CD or USB function.



2 Proceed as follows.

**To repeat**

A single track/file

1 Press MODE [17] repeatedly until <math>\rightarrow</math> 1\* appears.

2 Press <math>\leftarrow</math> or <math>\rightarrow</math> [11] to select a track/file that you want to repeat. When you want to specify a folder that contains MP3/WMA files, press <math>\rightarrow</math> [11] (Folder) + or - [4] first to select a folder, and then press <math>\leftarrow</math> or <math>\rightarrow</math> [11] to select a file.

3 Press <math>\rightarrow</math> [11] to start Repeat Play.

All tracks/files

1 Press MODE [17] repeatedly until <math>\rightarrow</math> appears.

2 Press <math>\rightarrow</math> [11] to start Repeat Play.

A selected folder on an MP3/WMA disc or USB device

1 Press MODE [17] repeatedly until <math>\rightarrow</math> (Folder) and <math>\rightarrow</math>\* appear.

2 Select a folder by pressing <math>\rightarrow</math> [11] (Folder) + or - [4].

3 Press <math>\rightarrow</math> [11] to start Repeat Play.

Programmed tracks/files

1 Program tracks/files (see "Creating your own program (Program Play)").

2 Press MODE [17] until "PGM" and <math>\rightarrow</math>\* appear on the display.

3 Press <math>\rightarrow</math> [11] to start Repeat Play.

**To cancel Repeat Play**

Press <math>\rightarrow</math> [11] to stop playback, and then press MODE [17] repeatedly until <math>\rightarrow</math>\* (or <math>\rightarrow</math> 1\*) disappears from the display.

## Presetting radio stations

You can store radio stations in the unit's memory. You can preset up to 30 radio stations, 20 for FM and 10 for AM.

1 Press RADIO FM/AM [2] repeatedly to select a band.



2 Hold down RADIO FM/AM-AUTO PRESET [2] until "AUTO" flashes on the display.

3 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.



4 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

5 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

6 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

7 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

8 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

9 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

10 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

11 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

12 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

13 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

14 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

15 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

16 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

17 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

18 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

19 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

20 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

21 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

22 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

23 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

24 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

25 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

26 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

27 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

28 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

29 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

30 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

31 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

32 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

33 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

34 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

35 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

36 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

37 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

38 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

39 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

40 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

41 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

42 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

43 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

44 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

45 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

46 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

47 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

48 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

49 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

50 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

51 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

52 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

53 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

54 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

55 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

56 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

57 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

58 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

59 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

60 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

61 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

62 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

63 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

64 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

65 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

66 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

67 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

68 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

69 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

70 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

71 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

72 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

73 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

74 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

75 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

76 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

77 Press ENTER [3] to store the station. The stations are stored in memory from lower frequencies to higher ones.

## Additional Information

### Compatible devices

**Compatible USB devices**

Compatibility requirements for the USB devices are as follows. Before using a device with this unit, check that it meets the requirements.

• Compliance with USB 2.0 (Full Speed)

• Supports Mass Storage mode

\* Mass Storage mode is a mode that allows a USB device to become accessible to a host device, enabling file transfers. Most USB devices support Mass Storage mode.

**To select a memory on the device for playback or recording**

If the USB device has more than one memory (for example, an internal memory and a memory card), you can select which memory to use and then start playback or recording. Make sure to select a memory before starting playback or recording as you cannot select a memory during operation.

1 Connect the USB device to the <math>\rightarrow</math> (USB) port [12].

2 Press USB [2] to turn on the USB function.

3 Press USB-MEMORY SELECT [2] until "SELECT?" appears on the display.

MEMORY SELECT

4 Press ENTER [3].

5 Press <math>\leftarrow</math> or <math>\rightarrow</math> [11] repeatedly to select a memory number.

The memory name appears. The name will be displayed in various ways, depending on the specifications of the USB device.

If only one memory can be selected, proceed to step 6.

6 Press ENTER [3].

**Notes on the USB device**

• Operation is not always guaranteed, even if the USB devices meet the compatibility requirements.

• When a USB device is connected, the unit reads all the files on the device. If there are many folders or files on the device, it may take a long time for the unit to finish reading them.

• Do not connect a USB device to the unit through a USB hub.

• With some connected USB devices, after an operation is performed, there may be a delay before it is performed by this unit.

• This unit may not support the functions provided with a connected USB device.

• The playback order on this unit may differ from the playback order on a connected USB device.

• This unit cannot be used to charge USB devices.

**Compatible Bluetooth devices**

Compatibility requirements for the devices are as follows. Before using a device with this unit, check that it meets the requirements.

• Devices must conform to Bluetooth Standard version 3.0.

• Devices must support A2DP (Advanced Audio Distribution Profile) and AVRCP (Audio/Video Remote Control Profile).

• NFC capability (required only when using the NFC pairing function of the unit).

For the latest information on compatible Bluetooth devices, including NFC-compatible smartphones, check the websites below.

For customers in Europe: <http://support.sony-europe.com/>

For customers in Latin America: <http://esupport.sony.com/LA>

For customers in other countries/regions: <http://www.sony-asia.com/support>

## Listening to preset radio stations

1 Press RADIO FM/AM [2] repeatedly to select a band.

2 Press PRESET + or - [11] to select a stored preset number for the desired radio station.

3 Press ENTER [3] to start playback.

4 Press ENTER [3] to start playback.

5 Press ENTER [3] to start playback.

6 Press ENTER [3] to start playback.

7 Press ENTER [3] to start playback.

8 Press ENTER [3] to start playback.

9 Press ENTER [3] to start playback.

10 Press ENTER [3] to start playback.

11 Press ENTER [3] to start playback.

12 Press ENTER [3] to start playback.

13 Press ENTER [3] to start playback.

14 Press ENTER [3] to start playback.

15 Press ENTER [3] to start playback.

16 Press ENTER [3] to start playback.

17 Press ENTER [3] to start playback.

18 Press ENTER [3] to start playback.

19 Press ENTER [3] to start playback.

20 Press ENTER [3] to start playback.

21 Press ENTER [3] to start playback.

22 Press ENTER [3] to start playback.

23 Press ENTER [3] to start playback.

24 Press ENTER [3] to start playback.

25 Press ENTER [3] to start playback.

26 Press ENTER [3] to start playback.

27 Press ENTER [3] to start playback.

28 Press ENTER [3] to start playback.

29 Press ENTER [3] to start playback.

30 Press ENTER [3] to start playback.

31 Press ENTER [3] to start playback.

32 Press ENTER [3] to start playback.

33 Press ENTER [3] to start playback.

34 Press ENTER [3] to start playback.

35 Press ENTER [3] to start playback.

36 Press ENTER [3] to start playback.

37 Press ENTER [3] to start playback.

38 Press ENTER [3] to start playback.

39 Press ENTER [3] to start playback.

40 Press ENTER [3] to start playback.

41 Press ENTER [3] to start playback.

42 Press ENTER [3] to start playback.

43 Press ENTER [3] to start playback.

44 Press ENTER [3] to start playback.

45 Press ENTER [3] to start playback.

46 Press ENTER [3] to start playback.

## Precautions

**Discs that this unit CAN play**

• Audio CD (CD-DA)\* tracks

• CD-R/CD-RW that contains MP3/WMA files and is finalized\*\* correctly.

\* CD-DA is the abbreviation for Compact Disc Digital Audio. It is a recording standard used for audio CDs.

\*\* Finalizing is the process to make the CD-R/CD-RW discs playable on the consumer disc player products, and the finalizing can be enabled or disabled as optional settings during disc creation in most recording software.

**Discs that this unit CANNOT play**

• CD-R/CD-RW other than those recorded in audio CD format or formats conforming to ISO 9660 Level 1/Level 2 or Joliet

• CD-R/CD-RW of poor recording quality, CD-R/CD-RW with scratches or that is dirty, or CD-R/CD-RW recorded using an incompatible recording device

• CD-R/CD-RW that is unfinalized or finalized incorrectly

**Notes on discs**

• Before playing, clean the CD with a cleaning cloth. Wipe the CD from the center out. If there are scratches, dirt or fingerprints on the CD, a tracking error may occur.

• Do not use solvents such as benzene, thinner, commercially available cleaners or anti-static spray intended for vinyl LPs.

• Do not expose the CD to direct sunlight or heat sources such as hot air ducts, or leave it in a car parked in direct sunlight as there can be a considerable rise in temperature inside the car.

• Do not stick paper or a sticker on the CD, or scratch the surface of the CD.

• After playing, store the CD in its case.

**Note on DualDiscs**