

SONY®

User guide

Mono Bluetooth® Headset
MBH10

Contents


Introduction.....	3
Basics.....	3
Using your headset.....	5
Troubleshooting.....	6
Legal information.....	6

Introduction

Function overview

With the Mono Bluetooth® Headset, you can control incoming and outgoing phone calls while you listen to music from your phone. You can connect your Bluetooth® headset to two Bluetooth® devices at the same time so that you can receive calls from two phones without having to disconnect and reconnect.

Accessory overview

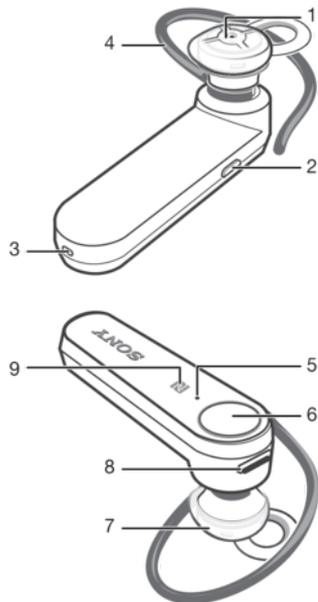

1. Ear speaker

2. Volume key

3. Microphone

4. Ear hook

5. Notification light

6. Power key/Call key

7. Ear speaker cover

8. Micro USB port

9. NFC detection area


💡 Compatibility information for your accessory is available at www.sonymobile.com/support.

Basics

Charging the battery

Before using the Mono Bluetooth® Headset for the first time, you need to charge the headset for approximately 2.5 hours. Sony chargers are recommended.

To charge the battery

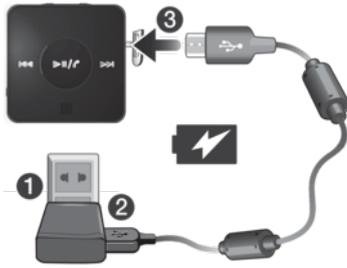

- 1 Plug one end of the USB cable into the charger (or into the USB port of a computer).
- 2 Plug the other end of the cable into the Micro USB port on your Mono Bluetooth® Headset .

Turning the headset on and off

To turn on the headset

- Press and hold down the Power key until the notification light turns green.

To turn off the headset

- Press and hold down the Power key until the red notification light flashes once.

Pairing the headset with compatible devices

Before you can use the headset, you need to pair it with a Bluetooth® compatible device, for example, a phone. There are two ways to pair the headset: manually, and automatically using NFC. After successful pairing, the headset connects to the Bluetooth® compatible device as soon as the headset is turned on and within range. After that, you can also pair the headset with a second Bluetooth® compatible device in the same way.

To manually pair the headset with a Bluetooth® device

- 1 Make sure the Bluetooth® device has the Bluetooth® function turned on.
- 2 Turn off the headset.
- 3 **Headset:** Press and hold down the Power key until a green notification light starts flashing rapidly.
- 4 **Bluetooth® device:** Scan for Bluetooth® devices, then select **MBH10** in the list of available devices.
- 5 **Bluetooth® device:** Follow the pairing instructions that appear. If a passcode is required, enter "0000".

To automatically pair your headset with a Bluetooth® device



- 1 Make sure that the Bluetooth® device has the NFC function turned on and that the screen is active and unlocked.
 - 2 Place the Bluetooth® device over your headset so that the NFC detection area of each device touches the other.
 - 3 Follow the pairing instructions that appear on the Bluetooth® device. If a passcode is required, enter "0000".
- ! The device used in this illustration is for illustration purposes only and may not accurately depict the actual device used.
- 💡 You can pair your headset with a compatible device using NFC even when the headset is turned off.

Adjusting the volume

To change the call volume

- During a call, press the Volume key.
- 💡 You hear a slightly longer, higher-pitched beep when the volume reaches the maximum level. After the volume reaches the maximum level, the volume goes down if you keep pressing the Volume key.

Wearing instruction



You can wear the headset with or without the ear hook, and on either the left or right ear.

Using your headset

Call handling

To answer a call with the headset

- When you hear an incoming call signal, press the Call key.

To end a call

- During an ongoing call, press the Call key.

To reject a call

- When you hear an incoming call signal, press and hold down the Call key.

To mute the microphone during a call

- Press and hold down the Volume key.
- 💡 When the microphone is muted, press and hold down the Volume key again to activate the microphone.

To answer a second call

- When you hear an incoming call signal during an ongoing call, press the Call key. The ongoing call is put on hold.

To reject a second call

- When you hear an incoming call signal during an ongoing call, press and hold down the Call key.

To switch between two calls

- Press and hold down the Call key.

Multipoint technology

Use Multipoint technology to connect your headset to two Bluetooth® devices at the same time. For example, if you connect your headset with two phones, you can receive calls from both phones without having to disconnect and reconnect.

If you prefer that your headset connects to just one Bluetooth® device at any given time, you can use Singlepoint mode instead. Singlepoint mode is enabled by default. Before pairing your headset with a new device in Singlepoint mode, make sure that you disconnect it from other devices.

- ! Multipoint mode consumes more battery power than Singlepoint mode.

To connect your headset to two devices at the same time

- 1 Make sure that the headset is turned off and that the two Bluetooth® devices have the Bluetooth® function turned on.
- 2 Press and hold down the Volume key while turning on the headset. After Multipoint mode is activated, a yellow notification light will flash twice.
- 3 Pair and connect your headset to the two Bluetooth® devices, one after the other.
- 4 To deactivate Multipoint mode, press and hold down the Volume key again while turning on the headset. After Multipoint mode is deactivated, a yellow notification light will flash once.

- 💡 In Multipoint mode, if the connection to the first Bluetooth® device is lost when you connect to a second device, restart your headset.

Troubleshooting

I cannot answer a second call

- Make sure that your calling device supports the Bluetooth® headset profile.
- Make sure that the correct calling device is selected.

The headset turns off automatically

- If the headset beeps several times shortly before turning off, the battery level is low. Charge the battery.

Unexpected behaviour

- Restart the headset.

No connection between headset and other device

- Make sure that the headset is charged and within range of the device that you want to connect to. A maximum distance of 10 metres (33 feet), with no solid objects in between, is recommended.
- Disable the Bluetooth® function in the other device so that all connections are closed, then re-enable the Bluetooth® function and pair the headset with the device again.

Legal information

BluetoothSonyMBH10

Prior to use, please read the *Important information* leaflet separately provided.

This User guide is published by Sony Mobile Communications AB or its local affiliated company, without any warranty. Improvements and changes to this User guide necessitated by typographical errors, inaccuracies

of current information, or improvements to programs and/or equipment, may be made by Sony Mobile Communications AB at any time and without notice. Such changes will, however, be incorporated into new editions of this User guide.

All rights reserved.

©Sony Mobile Communications AB, 2012

Publication number: 1276-4920.1

Interoperability and compatibility among Bluetooth® devices varies. Device generally supports products utilizing Bluetooth® spec. 1.2 or higher, and Headset or Handsfree profile.

Sony is the trademark or registered trademark of Sony Corporation. Bluetooth® is the trademark of the Bluetooth (SIG) Inc. and is used under license. All other marks are the property of their respective owners. All rights reserved.

All product and company names mentioned herein are the trademarks or registered trademarks of their respective owners. Any rights not expressly granted herein are reserved. All other trademarks are property of their respective owners.

Visit www.sonymobile.com for more information.

All illustrations are for illustration only and may not accurately depict the actual accessory.

Declaration of Conformity for MBH10

We, **Sony Mobile Communications AB** of

Nya Vattentorget

SE-221 88 Lund, Sweden

declare under our sole responsibility that our product

Sony type RD-0020

and in combination with our accessories, to which this declaration relates is in conformity with the appropriate standards **EN 300 328-V1.7.1, EN 301 489-7-V1.3.1, EN 301 489-17-V2.1.1, EN 301 489-3-V1.4.1 and EN 60 950-1:2006+A11:2009+A1:2010+A12:2011** following the provisions of, Radio Equipment and Telecommunication Terminal Equipment directive **1999/5/EC**.

Lund, June 2013

CE 0682



Anders Grynge

Director, Head of Global Type Approval

We fulfil the requirements of the R&TTE Directive (1999/5/EC).

FCC Statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Any change or modification not expressly approved by Sony may void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Industry Canada Statement

This device complies with RSS-210 of Industry Canada.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This Class B digital apparatus complies with Canadian ICES-003.

The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems. The maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall comply with the e.i.r.p. limit; and the maximum antenna gain permitted for devices in the band 5725-5825 MHz shall comply with the e.i.r.p. limits specified for point-to-point and non point-to-point operation as appropriate. Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

Avis d'industrie Canada

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et, and (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux. Le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5250-5350 MHz et 5470-5725 MHz doit se conformer à la limite de p.i.r.e. Le gain maximal d'antenne permis (pour les dispositifs utilisant la bande 5725-5825 MHz) doit se conformer à la limite de p.i.r.e. spécifiée pour l'exploitation point à point et non point à point, selon le cas. De plus, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5 250-5 350 MHz et 5 650-5 850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.